



SINGLE HUNG

ARCHITECTURAL SYSTEMS FOR
THE MODERN AESTHETIC.

TECHNICAL CATALOG



HURRICANE AND
IMPACT RESISTANT
WINDOWS & DOORS

LMI FL# - FL48151.1
SMI FL# - FL48151.2

CERTIFICATIONS



FBC
CERTIFICATE

<https://unik-windows.com/fbc-single-hung-window>

SINGLE HUNG

OVERVIEW & SPECIFICATIONS

The Single Hung window redefines casement functionality with its spring system. Designed for effortless operation, it allows smooth upward vertical opening that integrates fresh air and light, elevating the comfort and design of any space with discreet elegance.

SPECIFICATIONS

- Hung window
- LMI Design
- SMI Design



DIMENSIONS AND PERFORMANCE

- LMI Design: Design load: 80 PSF
Max Panel Dimensions: 54" Width x 76" Height
- SMI Design: Design load 120 PSF
Max Panel Dimensions: 44" Width x 76" Height
- Air infiltration: 6.27 PSF
- Water infiltration: 18 PSF


GLASS OPTIONS

- Laminated


Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality.

SINGLE HUNG


CONFIGURATION & SECTION DETAILS

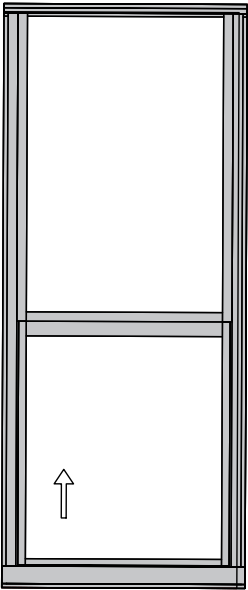

Vertical section

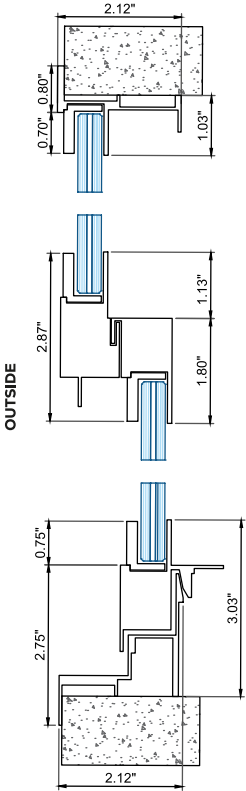


Horizontal section

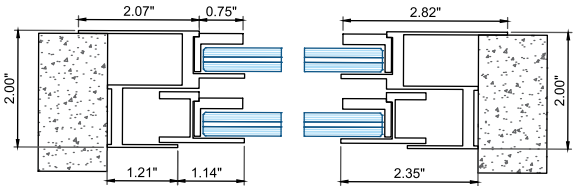


FINISHES & COLORS

DC13 Bone White



DC02 Silver



DC04 Grey



DC05 Dark Grey



DC11 Bronze




DC12 Black



MA04




MA07



MA08



MA09



MA10



*Custom colors available upon request.



Uni-K[®]
FENESTRATION

+305 420 6910

quotes@unik-windows.com

@unik.windows

VISIT OUR SHOWROOM

1 Curtis Pkwy. UNIT 11,
Miami, FL 33166
United States



DOWNLOAD THIS
BROCHURE WITH THIS QR

OR VISIT OUR WEBSITE
WWW.UNIK-WINDOWS.COM