



## KA WINDOW WALL

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

### Specifications

- Fixed Window Wall
- Head receptor option
- Transom Option
- Thermally broken
- Male / Female mullion option
- Bicolor option



HURRICANE AND  
IMPACT RESISTANT  
WINDOWS & DOORS

**Uni-K**  
FENESTRATION

# KA WINDOW WALL

## LMI Design

- Design load: 70 PSF
- Max Dimensions: 60" Width x 144" Height

## SMI Design

- Design load 110 PSF
- Max Dimensions: 60" Width x 108" Height

## LMI / SMI

- Design load 100,25 PSF
- Max Dimensions: 60" Width x 130" Height
  
- Air infiltration: 6.27 PSF
- Water infiltration: 16.5 PSF

## Glass Options:


- Laminated
- Insulated
- Insulated laminated

## TYPES



Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality

## Thermal Performance Simulation

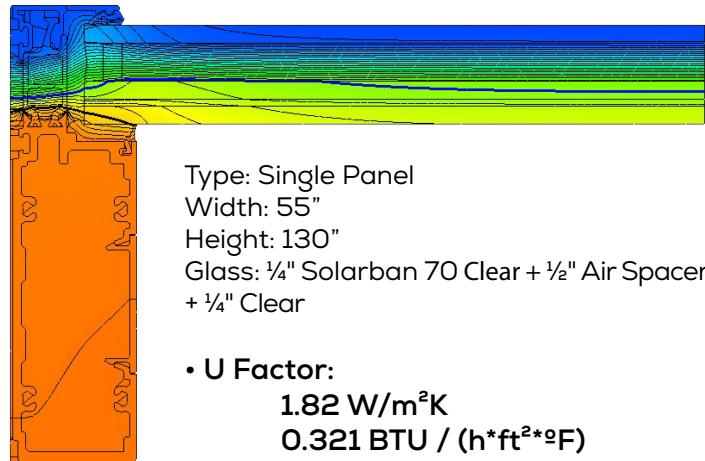

Type: Single Panel

Width: 55"

Height: 130"

Glass:  $\frac{1}{4}$ " Solarban 70 Clear +  $\frac{1}{2}$ " Air Spacer +  $\frac{1}{4}$ " Clear

### • U Factor:


1.82 W/m<sup>2</sup>K

0.321 BTU / (h\*ft<sup>2</sup>\*°F)


## Single Fixed Panel



Top section  
with head  
receptor

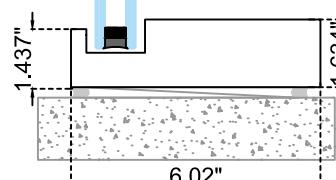


## Horizontal Section


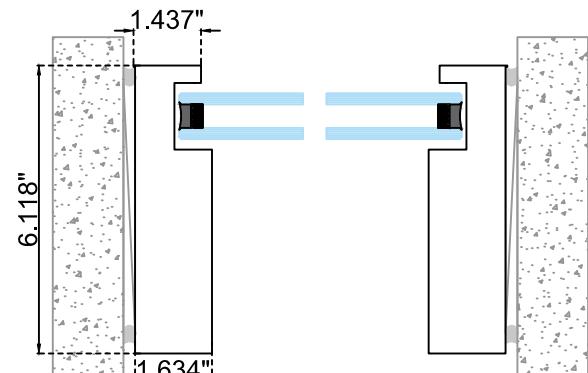




**Number Of Fixed Panels (#N)**

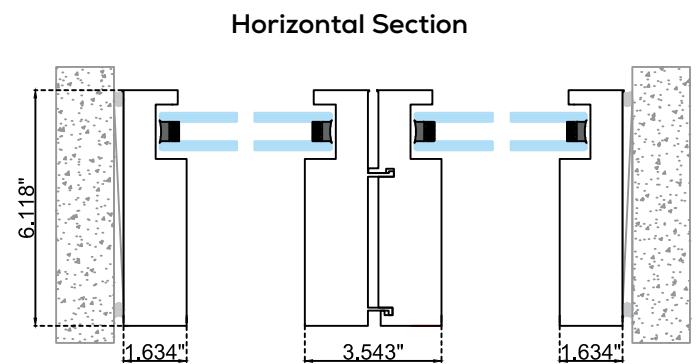


**Number Of Fixed Panels (#N)**

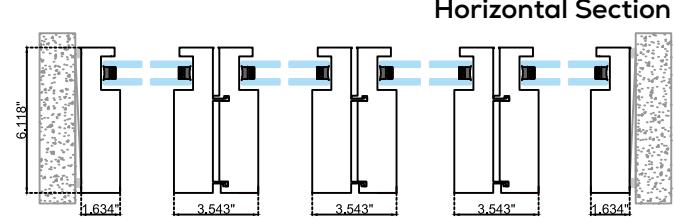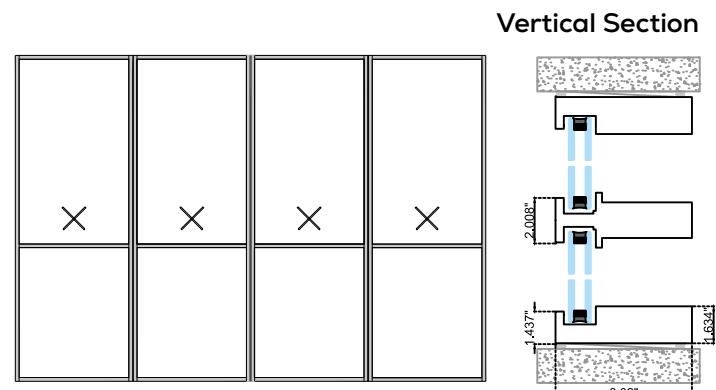


## COLORS


DC13 Matte White

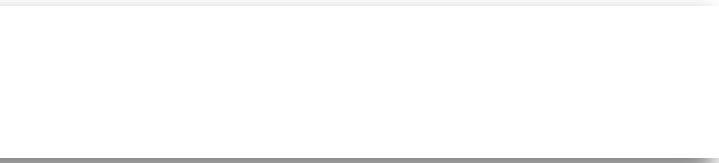


DC02 Silver

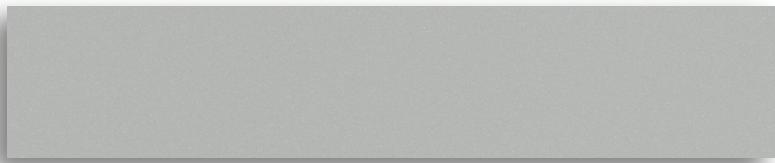


DC04 Grey

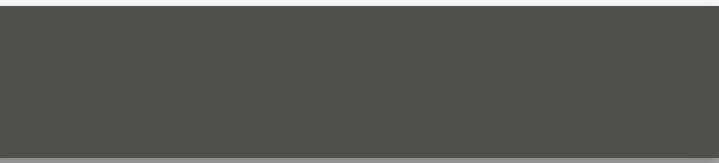


DC05 Dark Grey

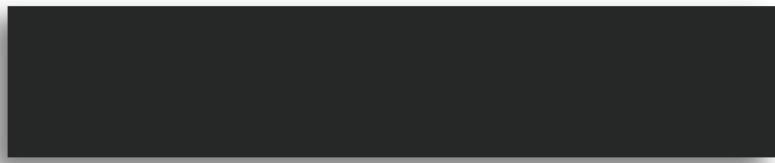

DC12 Black

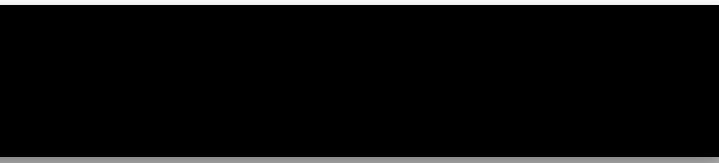


DC11 Bronze

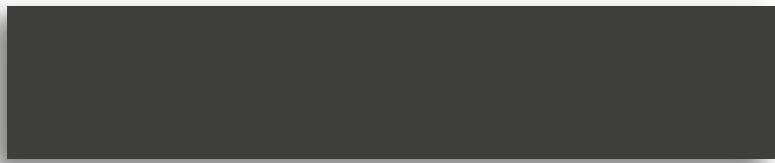

MA04



MA07

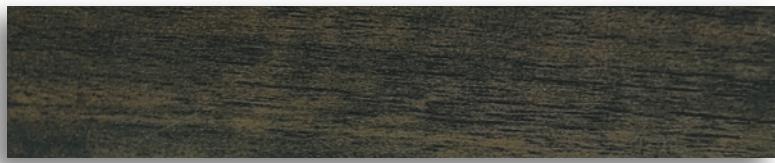

MA08



MA09



MA10



**Uni-K**  
FENESTRATION

+305 420 6910

[info@unik-windows.com](mailto:info@unik-windows.com)

  @unik.windows

Download this brochure  
with this QR



or visit our website  
[www.unik-windows.com](http://www.unik-windows.com)