



KA WINDOW WALL

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

Specifications

- Fixed Window Wall
- Head receptor option
- Transom Option
- Thermally broken
- Male / Female mullion option
- Bicolor option

<https://n9.cl/7eb4c>



NFRC
CERTIFICATE



HURRICANE AND
IMPACT RESISTANT
WINDOWS & DOORS

Uni-K
FENESTRATION

KA WINDOW WALL

LMI Design

- Design load: 70 PSF
- Max Dimensions: 60" Width x 144" Height

SMI Design

- Design load 110 PSF
- Max Dimensions: 60" Width x 108" Height

LMI / SMI

- Design load 100,25 PSF
- Max Dimensions: 60" Width x 130" Height


- Air infiltration: 6.27 PSF
- Water infiltration: 16.5 PSF

Glass Options:

- Laminated
- Insulated
- Insulated laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality


Thermal Performance Simulation

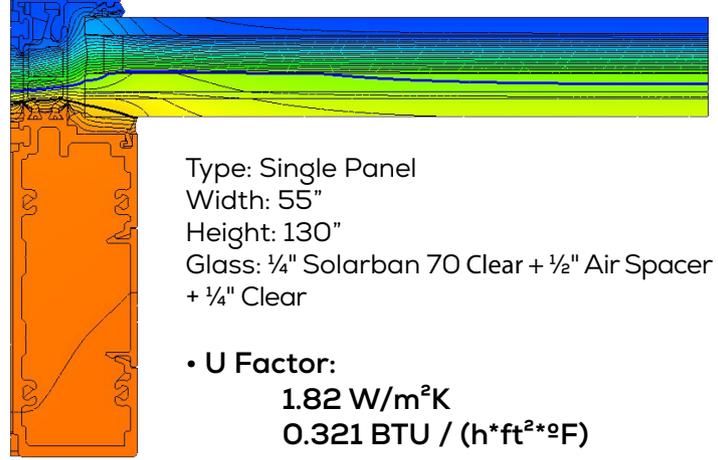


TYPES



Single Fixed Panel

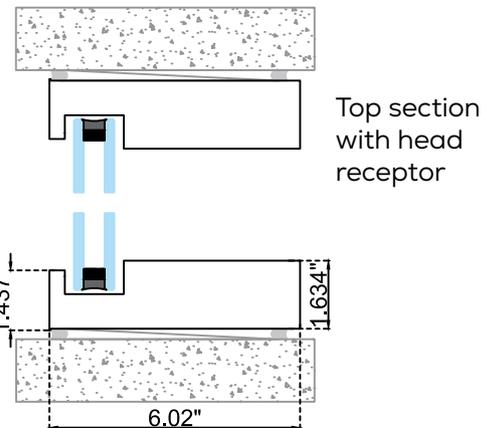


Horizontal Section

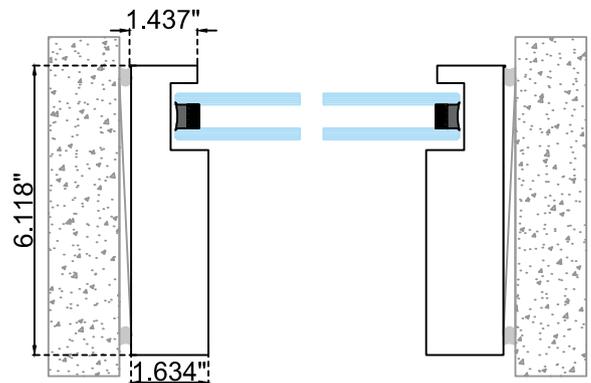




Number Of Fixed Panels (#N)

Horizontal Section

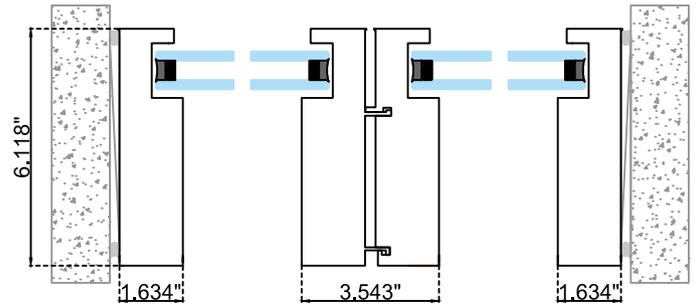


Number Of Fixed Panels (#N)

Vertical Section

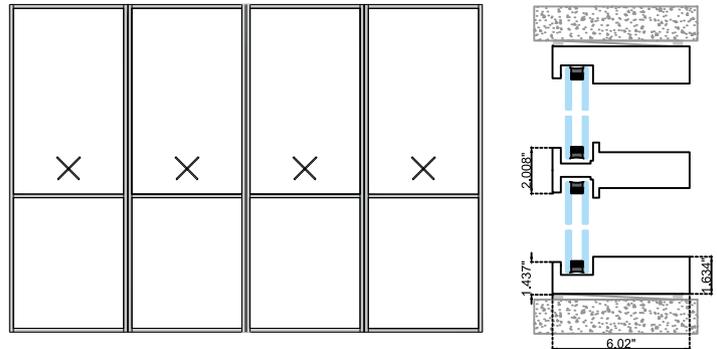

Horizontal Section

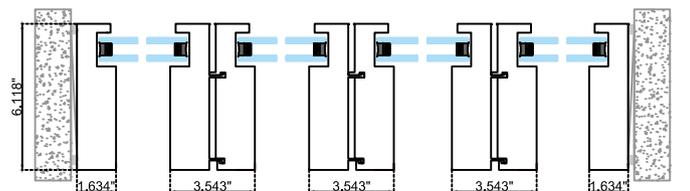

COLORS


DC13 Matte White



DC04 Grey




DC12 Black

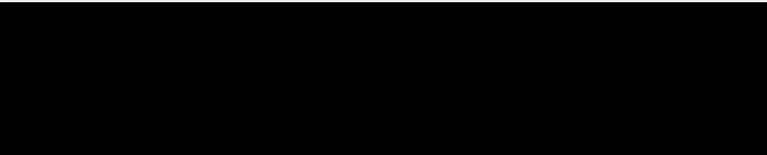


MA04




MA08

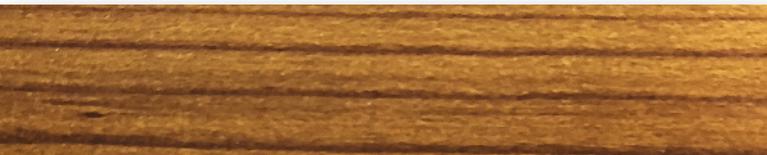


DC02 Silver

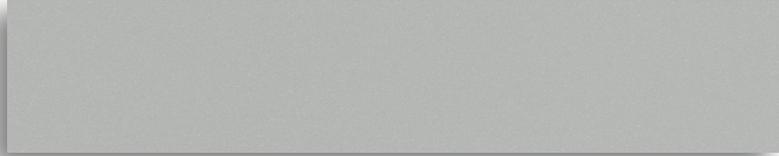


DC05 Dark Grey

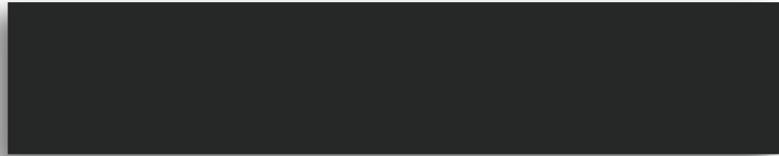

DC11 Bronze

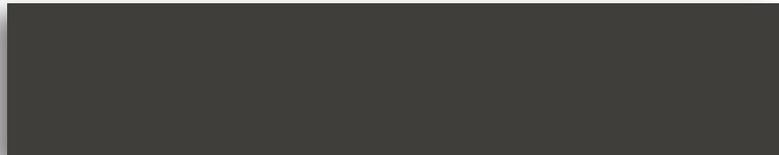

MA07

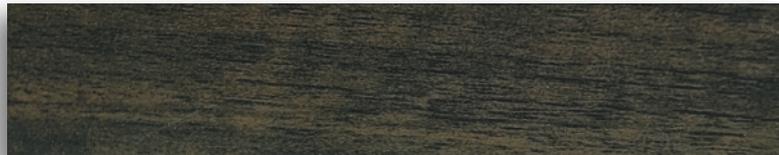

MA09



MA10



Uni-K
FENESTRATION

+305 420 6910

info@unik-windows.com

  @unik.windows

Download this brochure
with this QR



or visit our website
www.unik-windows.com