



KA SGD (Sliding)

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

Specifications

- Sliding glass door
- Works as an integral system with all KA products
- Multi point lock system
- 2 and 3 track option
- Standard and Heavy Interlock option
- Standard and heavy astragal option
- Sill racer option
- Interlock siteline: 1 11/32"

Uni-K
FENESTRATION



KA SGD (Sliding)

LMI Design

- Design load: 75 PSF
- Max Panel Dimensions : 60" Width x 144" Height

SMI Design

- Design load 120 PSF
- Max Panel Dimensions: 60" Width x 120" Height

Non Impact

- Design load 100.25 PSF
- Max Panel Dimensions: 54" Width x 120" Height

-
- Air infiltration: 6.27 PSF
 - Water infiltration: 18 PSF
-


Glass Options:

- Laminated
- Insulated
- Insulated laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality





2 TRACKS FRAME


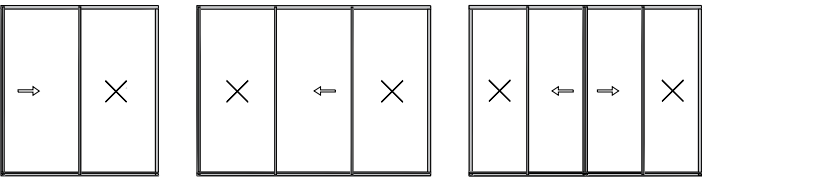


HORIZONTAL CROSS SECTION


TRACK WITH SILL RISER

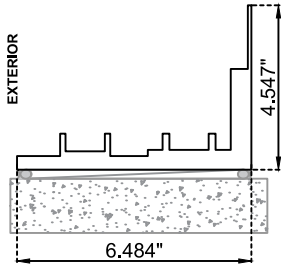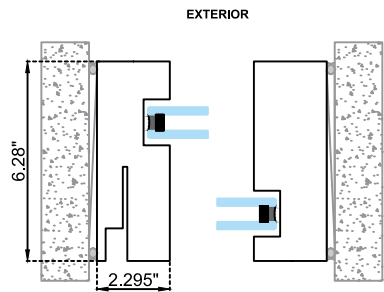

VERTICAL CROSS SECTION


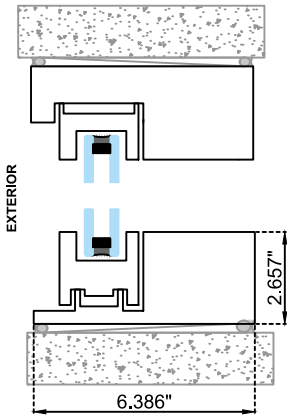
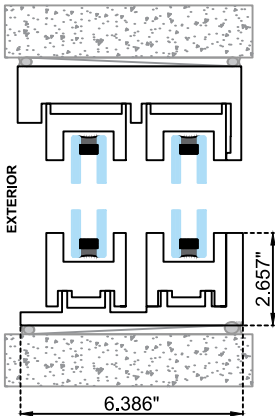


3 TRACKS FRAME

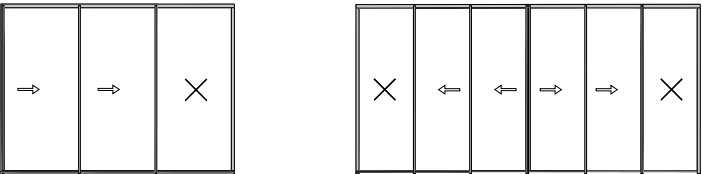


HORIZONTAL CROSS SECTION

VERTICAL CROSS SECTION

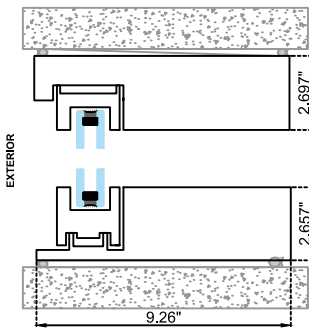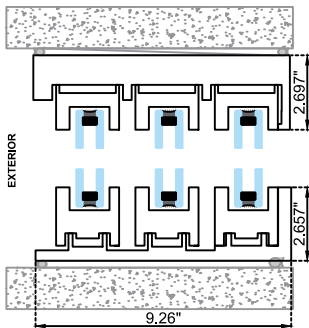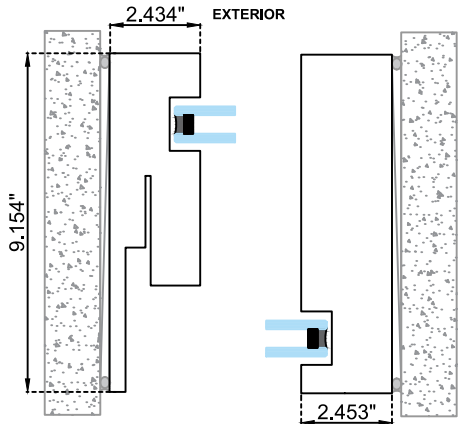

TRACK WITH SILL RISER

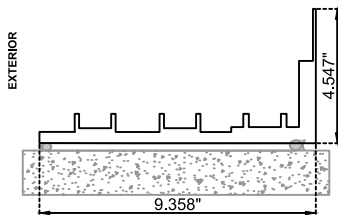






INTERLOCK

INTERLOCK +

ASTRAGAL


ASTRAGAL +

FIXED ASTRAGAL




COLORS

DC11 Matte White




DC02 Silver

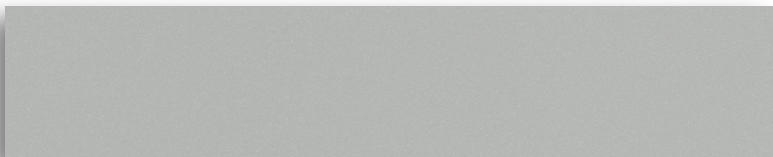

DC04 Grey




DC05 Dark Grey

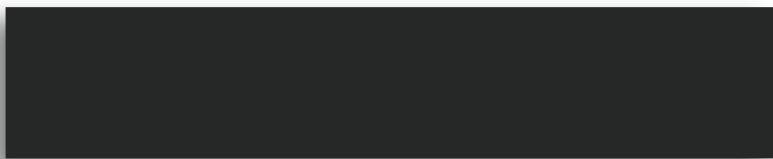

DC12 Black




DC13 Bronze

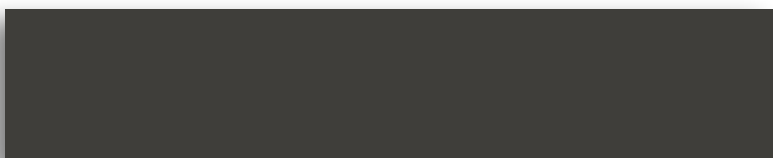


MA04




MA07

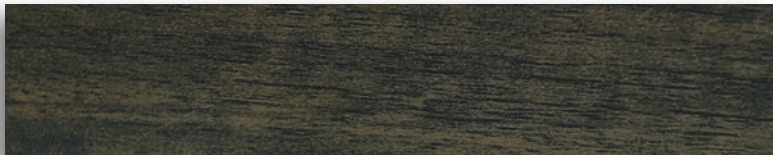


MA08

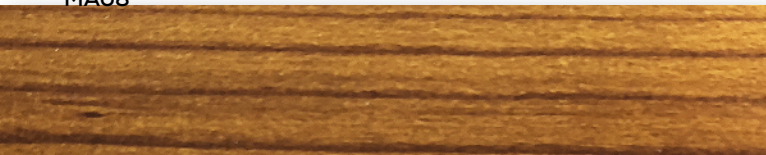

MA09

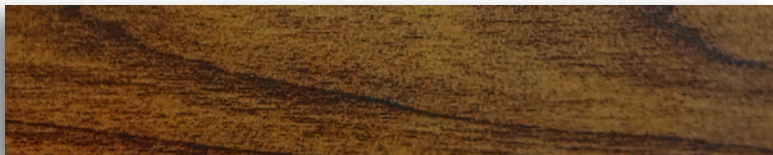

MA10

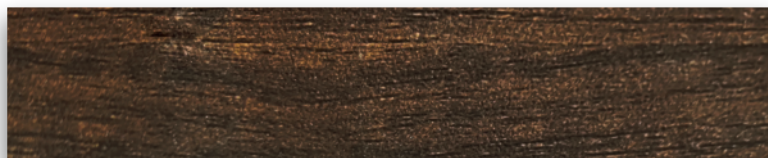

Uni-K
FENESTRATION


+305 420 6910

info@unik-windows.com



@unik.windows

Download this brochure
with this QR



or visit our website
www.unik-windows.com