



KA CASEMENT

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

Specifications

- Casement out Window / Balcony Door
- Thermally broken
- Multi point lock sistem
- Hidden hinges
- Internal Hidden Frame option
- Bicolor option



NFRC
CERTIFICATE



HURRICANE AND
IMPACT RESISTANT
WINDOWS & DOORS

Uni-K
FENESTRATION



KA CASEMENT

LMI Design

- Design load: 70 PSF
- Max Dimensions:
40" Width x 108" Height

SMI Design

- Design load 110 PSF
- Max Dimensions:
50" Width x 76" Height

LMI / SMI

- Design load 100.25 PSF
- Max Dimensions:
50" Width x 76" Height

- Air infiltration: 6.27 PSF
- Water infiltration: 16.5 PSF


Glass Options:

- Laminated
- Insulated
- Insulated laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality



Thermal Performance Simulation

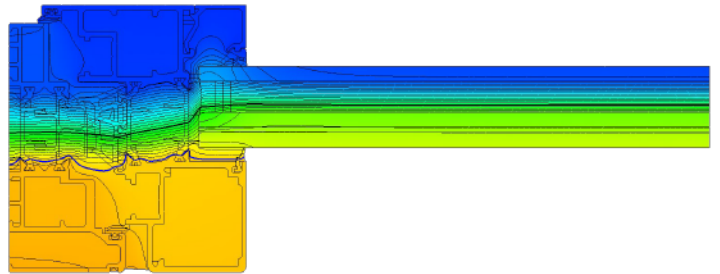

Type: Single Sash

Width: 38"

Height: 130"


Glass: $\frac{1}{4}$ " Solarban 70 Clear + $\frac{1}{2}$ " Air Spacer + $\frac{1}{4}$ " Clear

• U Factor:


1.98 W/m²K

0.348 BTU / (h*ft²*°F)

Vertical / Horizontal Section

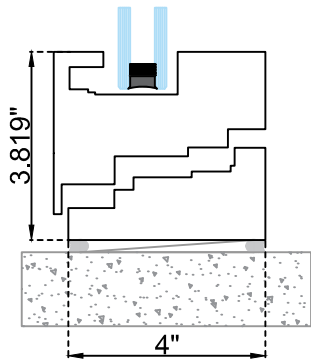


Full Frame

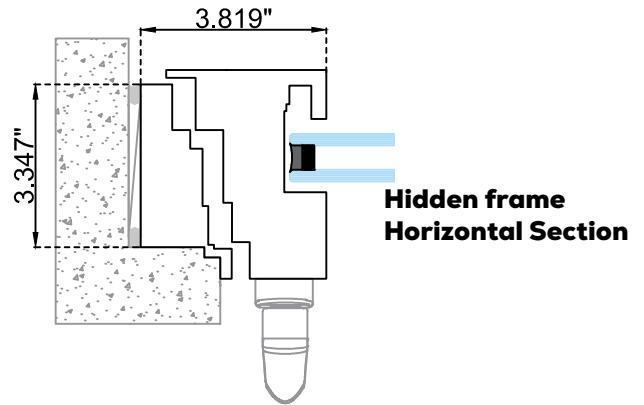


Hidden frame
Horizontal Section


TYPES




Single Sash

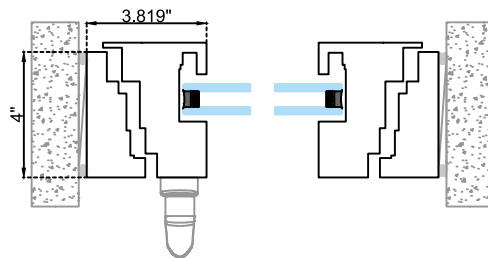


Horizontal Section




Double Sash

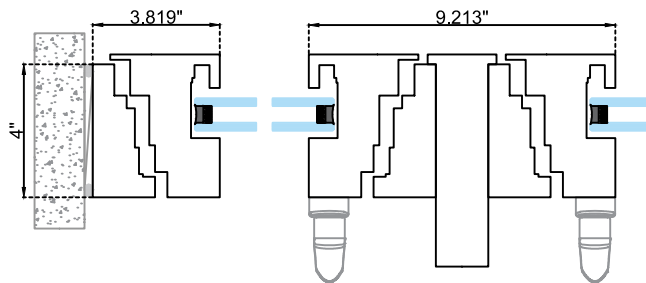


Horizontal Section




Single Sash+ Fixed

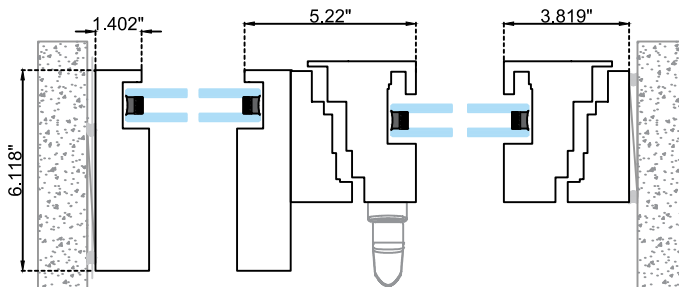

Horizontal Section




Single Sash + Fixed

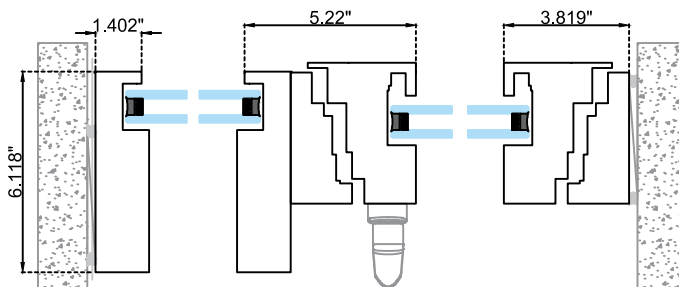


Horizontal Section

COLORS

DC11 Matte White




DC02 Silver

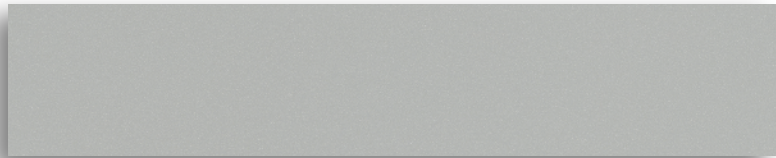


DC04 Grey



DC05 Dark Grey

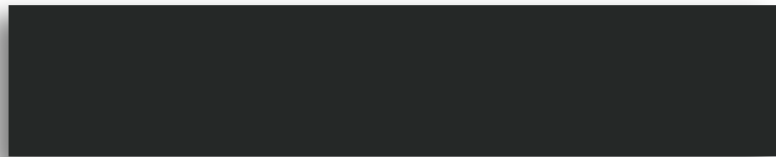

DC12 Black




DC13 Bronze




MA04




MA07

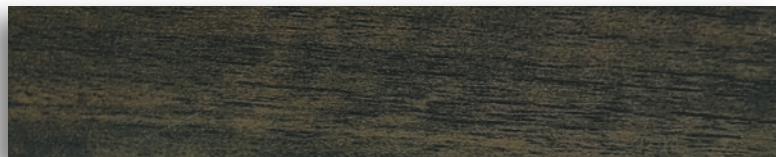

MA08

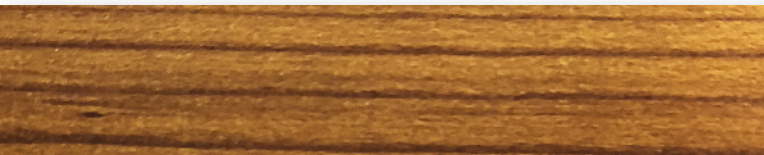

MA09

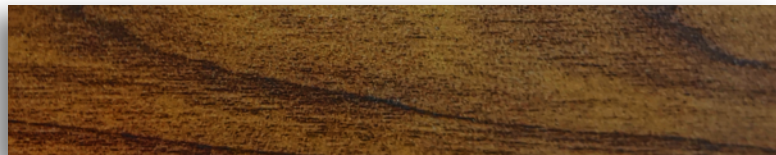

MA10



Uni-K
FENESTRATION

+305 420 6910

info@unik-windows.com

  @unik.windows

Download this brochure
with this QR



or visit our website
www.unik-windows.com