



KA FRENCH DOOR

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

Specifications

- French / Swinging door
- Single and Double door option
- Thermally broken
- Multi point lock system
- Bicolor option



NFRC
CERTIFICATE




HURRICANE AND
IMPACT RESISTANT
WINDOWS & DOORS

Uni-K
FENESTRATION



KA FRENCH DOOR

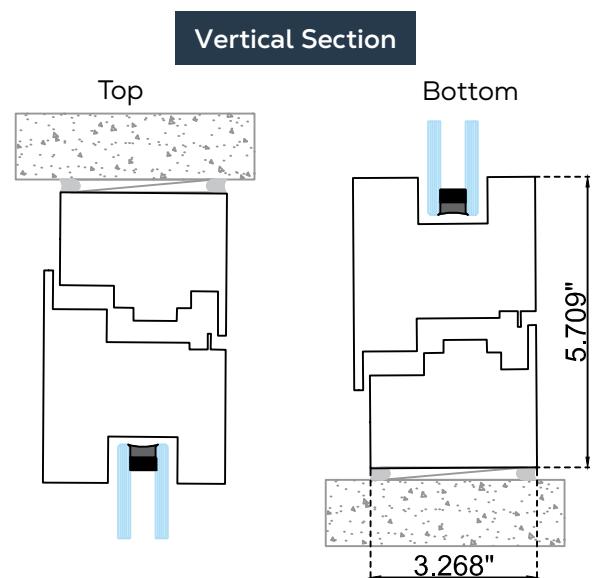

LMI Design

- Design load: 70 PSF
- Max Dimensions Double Door: 90" Width x 130" Height

SMI Design

- Design load 110 PSF
- Max Dimensions Single Door: 47" Width x 108" Height

LMI / SMI

- Design load 70 PSF
- Max Dimensions Double Door: 96" Width x 108" Height

- Air infiltration: 6.27 PSF
- Water infiltration: 16.5 PSF



Glass Options:

- Laminated
- Insulated
- Insulated laminated



Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality

Thermal Performance Simulation

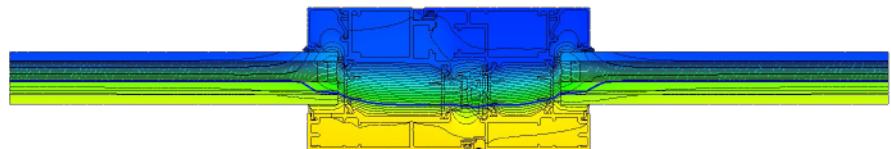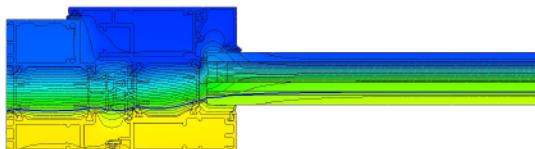


Type: Single Door
 Width: 45"
 Height: 130"
 Glass: $\frac{1}{4}$ " Solarban 70 Clear + $\frac{1}{2}$ " Air Spacer + $\frac{1}{4}$ " Clear


- U Factor:

2.37 W/m²K
 0.418 BTU / (h*ft²*°F)


TYPES




Single Door

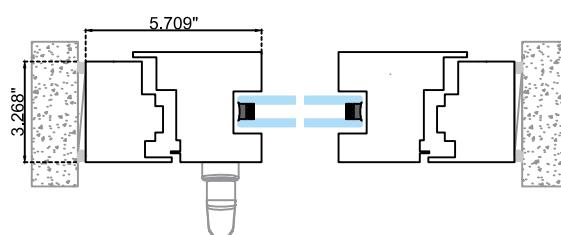


Horizontal Section




Double Door

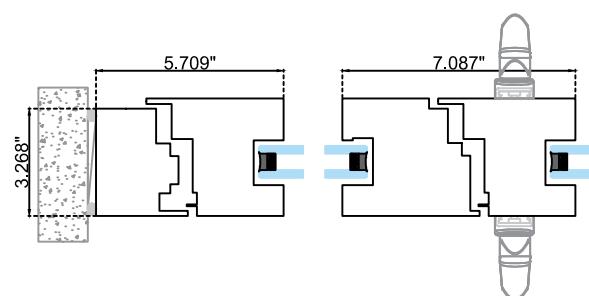


Horizontal Section

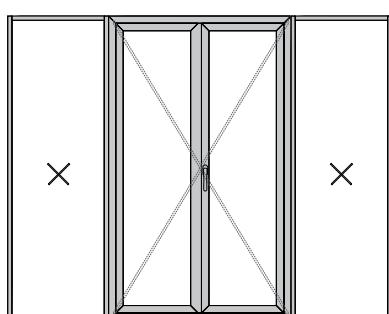

Double Door + Fixed

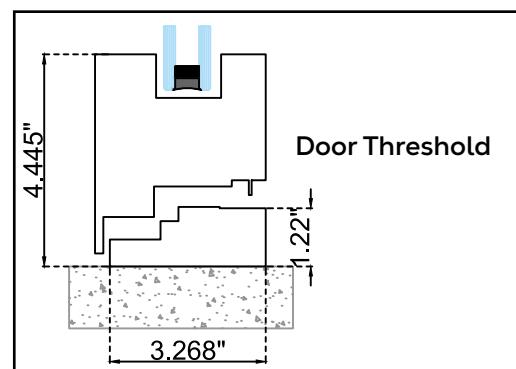


Door Threshold

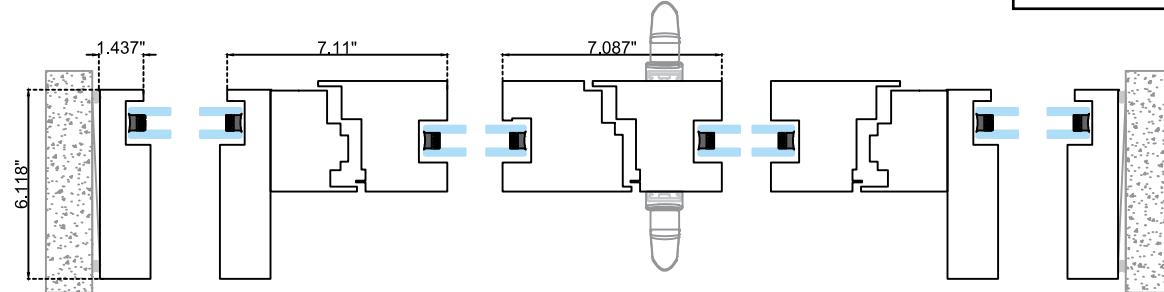


Horizontal Section

COLORS


DC11 Matte White

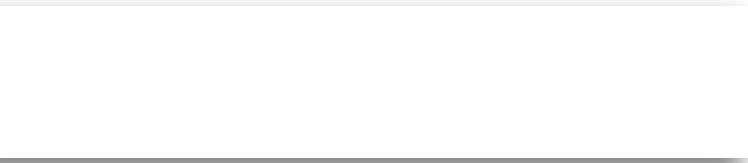


DC02 Silver

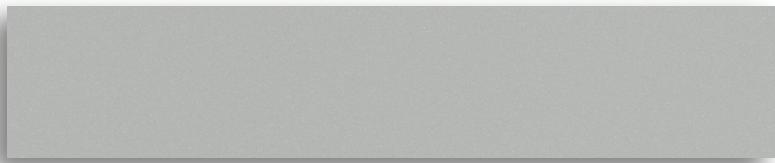


DC04 Grey

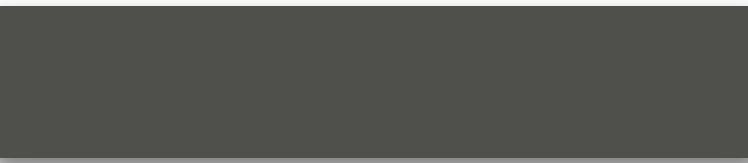


DC05 Dark Grey

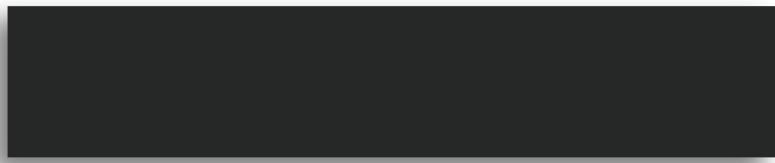

DC12 Black

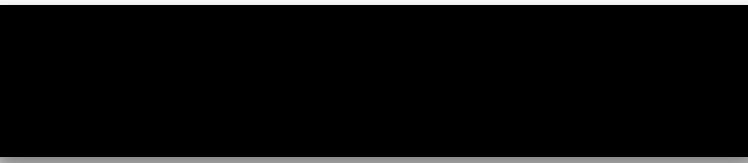


DC13 Bronze

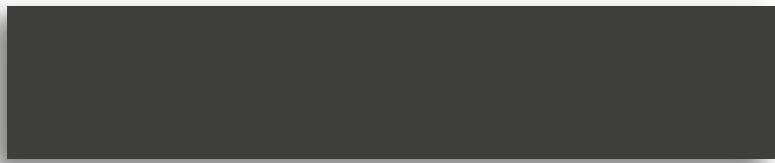

MA04



MA07

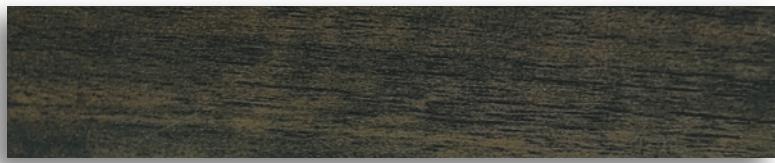

MA08



MA09



MA10



Uni-K
FENESTRATION

+305 420 6910

info@unik-windows.com

  [@unik.windows](https://www.unik.windows)

Download this brochure
with this QR



or visit our website
www.unik-windows.com