

# **KATILT AND TURN**

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

## **Specifications**

- Inward opening / till turn window and balcony door
- Works as an integral system with all KA products
- Thermally broken
- Hurricane resistant LMI/SMI
- Multi point lock system
- Internal hidden frame option
- Hidden Sash
- Hidden Hinges
- Bicolor Option



NFRC CERTIFICATE







# **KATILT AND TURN**

#### **LMI Design**

- Design load: 70 PSF
- Max Dimensions Single Window/Door:
  - 40" Width x 108" Height

#### **SMI Design**

- Design load 110 PSF
- Max Dimensions Single Window/Door:
  - 40" Width x 90" Height

#### **Non Impact**

- Design load 100.25 PSF
- Max Dimensions Single Window/Door:
  - 59" Width x 99" Height

· Air infiltration: 6.27 PSF


Water infiltration: 16.5 PSF

#### **Glass Options:**

- Laminated
- Insulated
- Insulated laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality

#### **Thermal Performance Simulation**

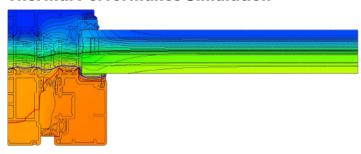

Type: Single Sash


Width: 38" Height: 130"

Glass: 1/4" Solarban 70 Clear + 1/2" Air Spacer + 1/4" Clear


• U Factor:

1.84 W/m<sup>2</sup>K 0.325 BTU / (h\*ft<sup>2</sup>\*<sup>9</sup>F)


#### Vertical / Horizontal Section

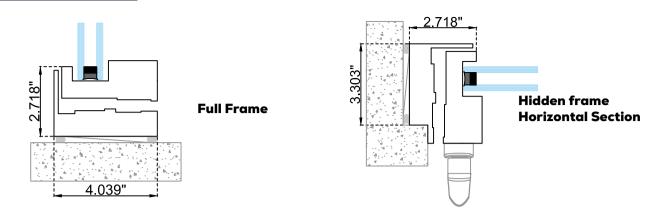

# **TYPES**

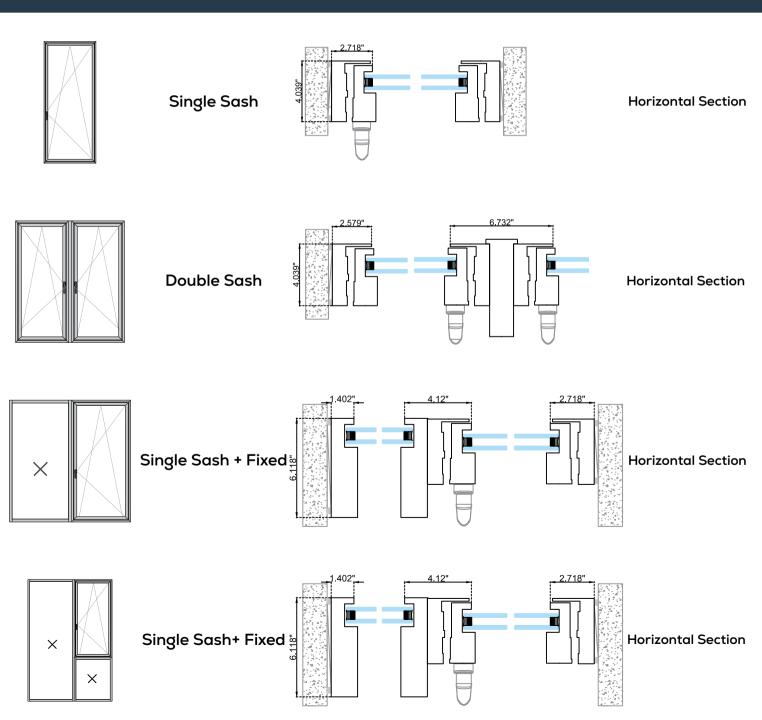

## **COLORS**

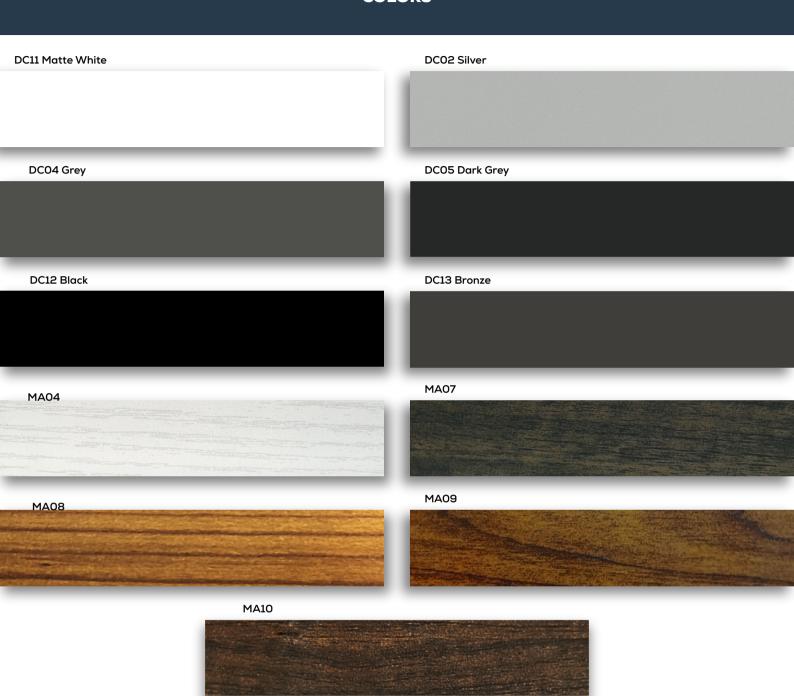



+305 420 6910

info@unik-windows.com



@ @unik.windows

