



## KA WINDOW WALL

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

### Specifications

- Fixed Window Wall
- Works as an integral system with all KA products
- Thermally broken
- Hurricane resistant LMI/SMI
- Head receptor option
- Transom Option
- Male / Female mullion option
- Bicolor option

**Uni-K**  
FENESTRATION

# KA WINDOW WALL

## LMI Design

- Design load: 70 PSF
- Max Dimensions: 60" Width x 144" Height

## SMI Design

- Design load 110 PSF
- Max Dimensions: 60" Width x 108" Height

## Non Impact

- Design load 100,25 PSF
- Max Dimensions: 60" Width x 130" Height


- 
- Air infiltration: 6.27 PSF
  - Water infiltration: 16.5 PSF
- 

## Glass Options:

- Laminated
- Insulated
- Insulated laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality


## Thermal Performance Simulation

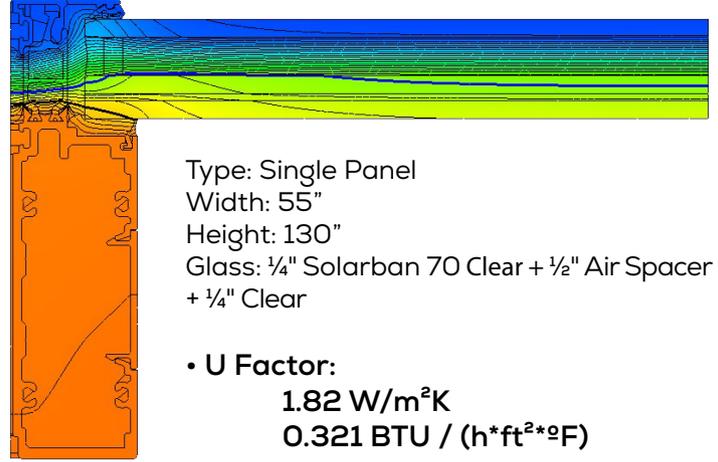


## TYPES



### Single Fixed Panel

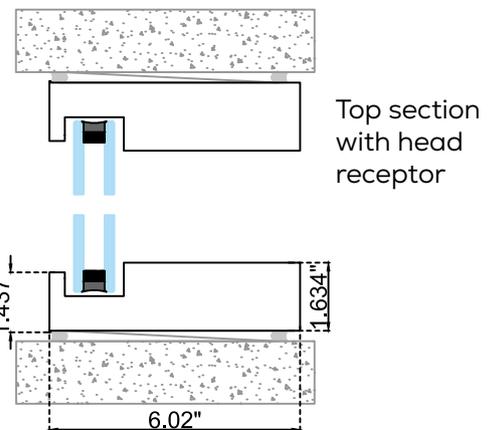


### Horizontal Section

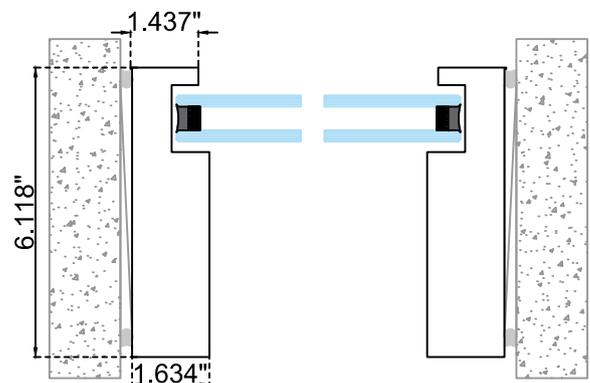




Number Of Fixed Panels (#N)

Horizontal Section

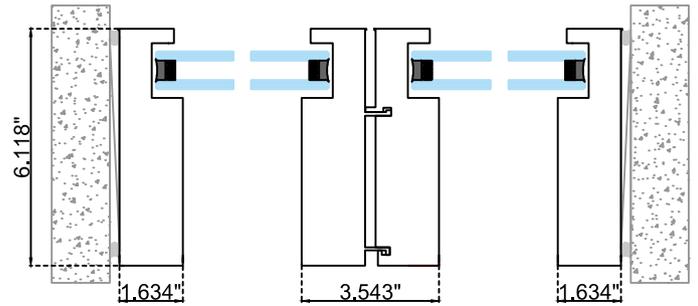


Number Of Fixed Panels (#N)

Vertical Section

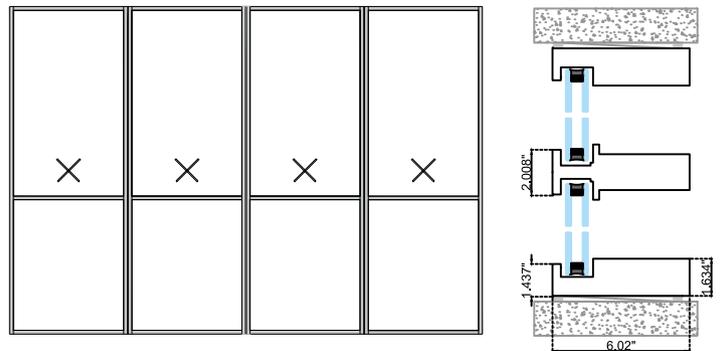


Horizontal Section

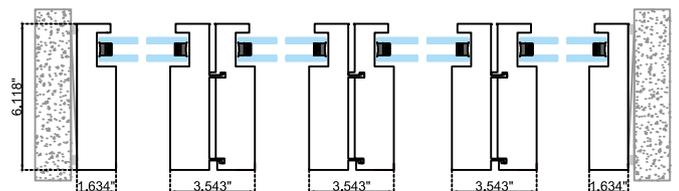


## COLORS

DC11 Matte White

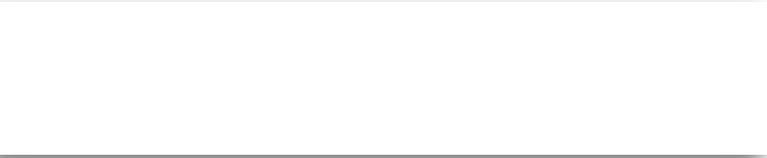


DC02 Silver

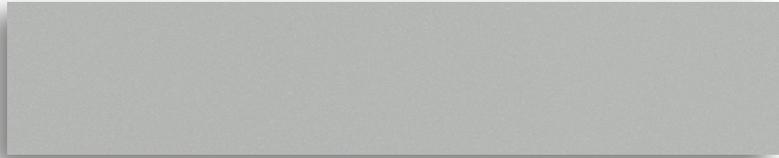


DC04 Grey



DC05 Dark Grey

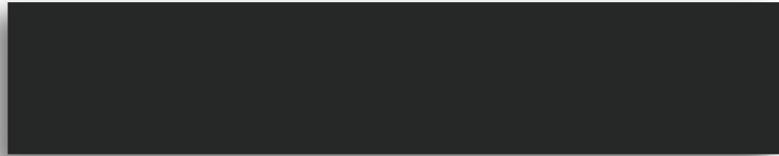

DC12 Black

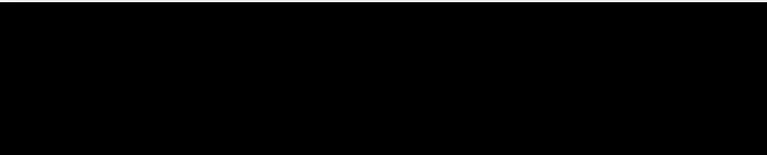

DC13 Bronze



MA04



MA07



MA08



MA09



MA10



**Uni-K**  
FENESTRATION

+305 420 6910

info@unik-windows.com

  @unik.windows

Download this brochure  
with this QR



or visit our website  
www.unik-windows.com