



SINGLE HUNG

The Single Hung window redefines casement functionality with its spring system. Designed for effortless operation, it allows smooth upward vertical opening that integrates fresh air and light, elevating the comfort and design of any space with discreet elegance.

Specifications

- Hung window
- LMI Design
- SMI Design



HURRICANE AND
IMPACT RESISTANT
WINDOWS & DOORS

Uni-K
FENESTRATION



SINGLE HUNG

LMI Design

- Design load: 85 PSF
- Water Infiltration: 12.75 PSF
- Max Panel Dimensions : 54" Width x 76" Height

SMI Design

- Design load 120 PSF
- Water Infiltration: 15.04 PSF
- Max Panel Dimensions: 54" Width x 76" Height


-
- Air infiltration: 6.27 PSF
 - Water infiltration: 18 PSF
-

Glass Options:


- Laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality



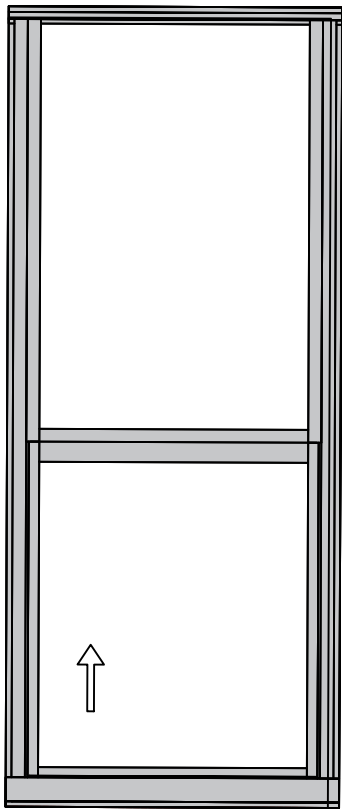


Horizontal Section

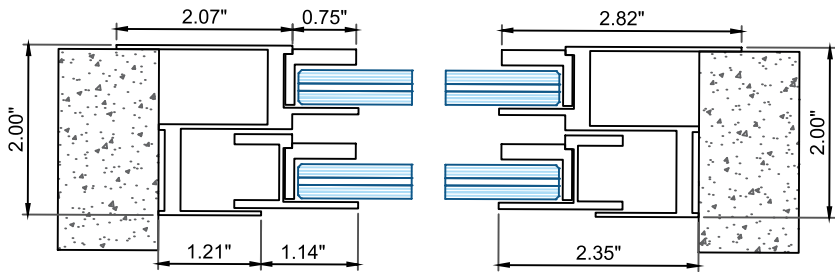

OUTSIDE


Vertical Section

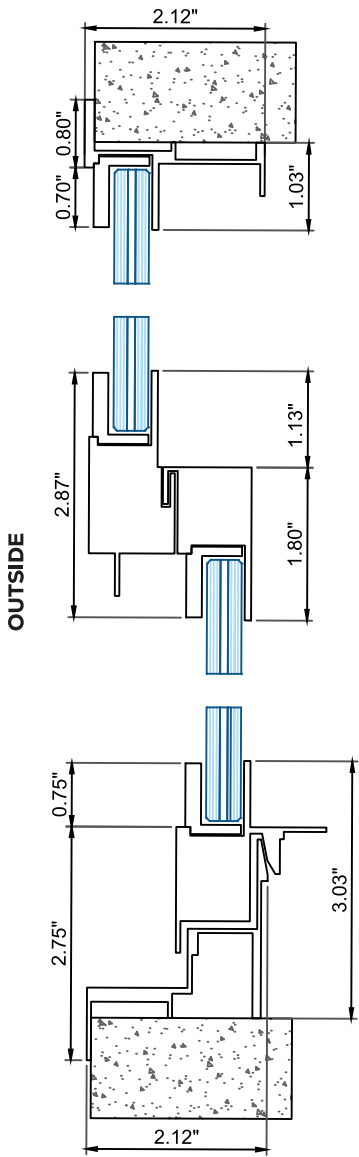


OUTSIDE

COLORS

DC11 Matte White




DC02 Silver

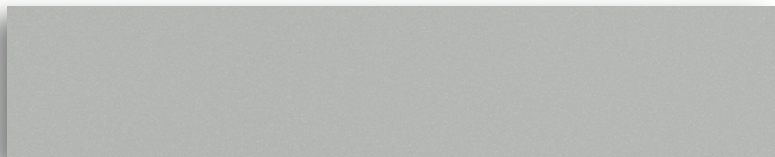

DC04 Grey




DC05 Dark Grey

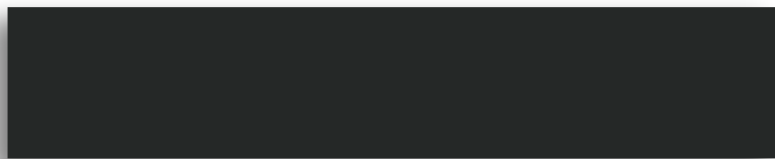

DC12 Black



DC13 Bronze

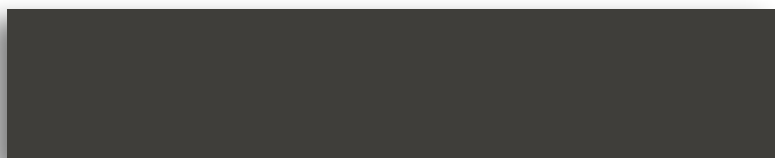


MA04




MA07




MA08

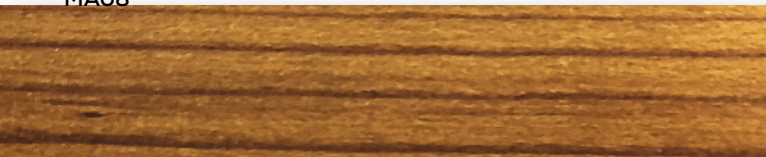

MA09

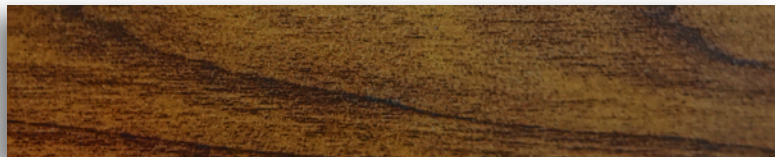

MA10

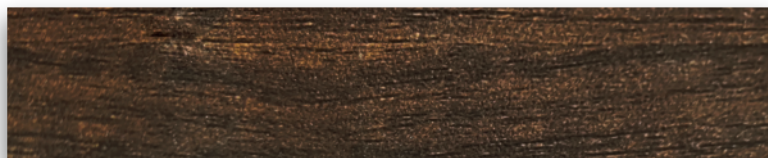

Uni-K
FENESTRATION

+305 420 6910

info@unik-windows.com

  @unik.windows

Download this brochure
with this QR



or visit our website
www.unik-windows.com