



KA FRENCH DOOR

Our beautiful KA line is designed to give your project a minimalist look that highlights the exterior view rather than the system frames. Even with such minimal frames, they meet all hurricane safety standards.

Specifications

- French / Swinging door
- Single and Double door option
- Thermally broken
- Multi point lock system
- Bicolor option

CERTIFICATIONS

<https://n9.cl/fuk7z>



FBC
CERTIFICATE

<https://n9.cl/2u76j7>



NFRC
CERTIFICATE



HURRICANE AND
IMPACT RESISTANT
WINDOWS & DOORS


LMI FL# - FL48030.1
SMI FL# - FL48030.2

Uni-K
FENESTRATION



KA FRENCH DOOR

Vertical Section

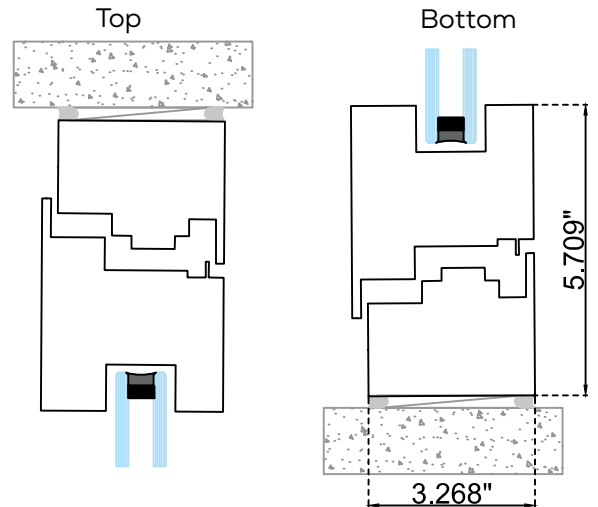

LMI Design

- Design load: 70 PSF
- Max Dimensions Double Door: 90" Width x 130" Height

SMI Design

- Design load 110 PSF
- Max Dimensions Single Door: 47" Width x 108" Height

Non Impact

- Design load 70 PSF
- Max Dimensions Double Door: 96" Width x 108" Height

- Air infiltration: 6.27 PSF
- Water infiltration: 16.5 PSF


Glass Options:

- Laminated
- Insulated
- Insulated laminated

Our glass is certified by SGCC and IGCC, ensuring that our processes always deliver the highest quality




Thermal Performance Simulation

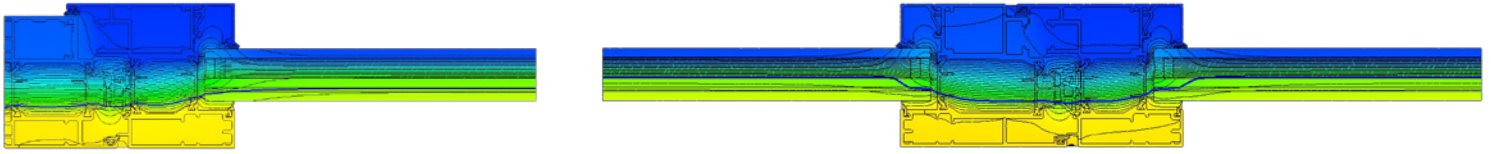


Type: Single Door
 Width: 45"
 Height: 130"
 Glass: ¼" Solarban 70 Clear + ½" Air Spacer + ¼" Clear

• U Factor:
 2.37 W/m²K
 0.418 BTU / (h*ft²*°F)


TYPES




Single Door

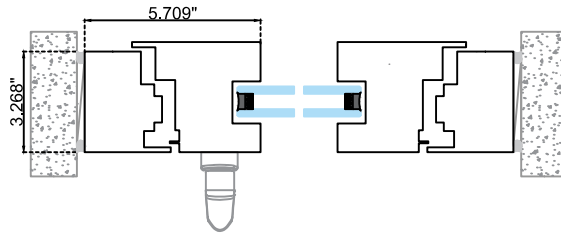


Horizontal Section




Double Door

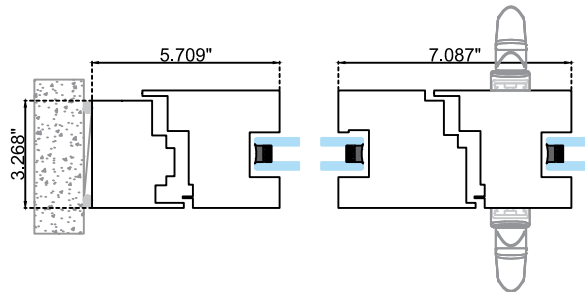


Horizontal Section

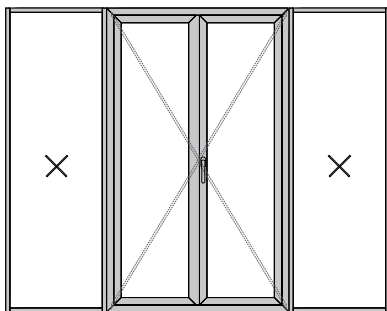

Double Door + Fixed

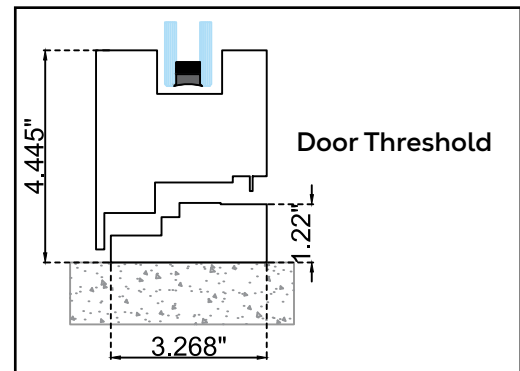

Door Threshold

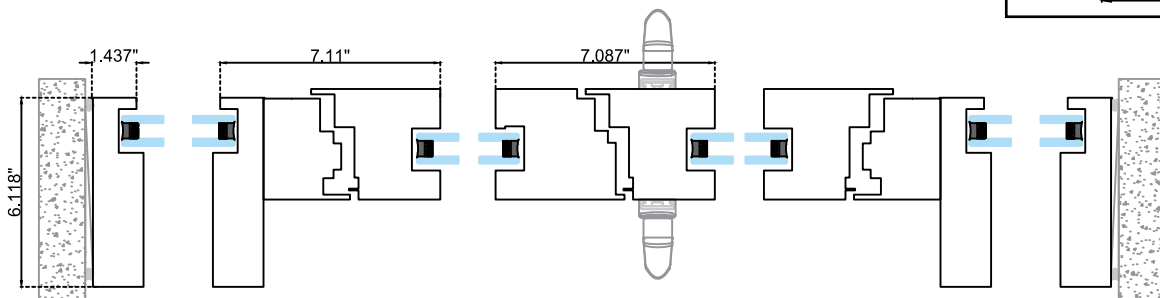


Horizontal Section

COLORS

DC13 Bone White




DC02 Silver

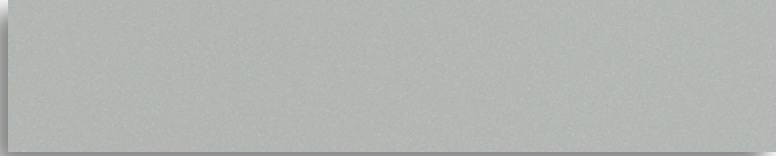


DC04 Grey



DC05 Dark Grey

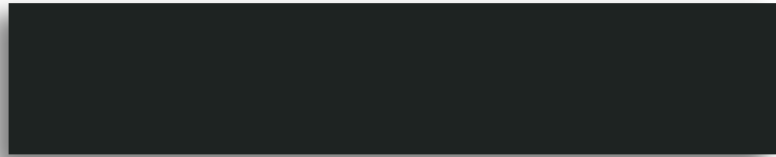


DC12 Black




DC11 Bronze




MA04

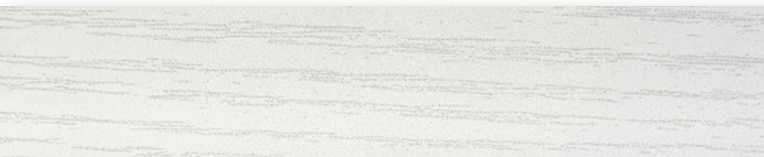


MA07

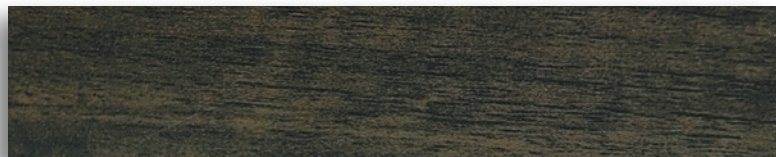


MA08

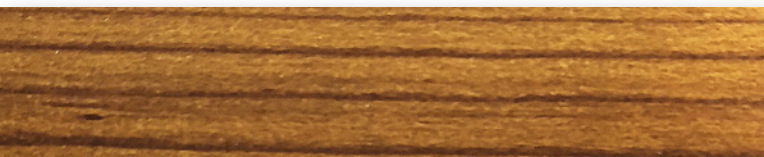

MA09

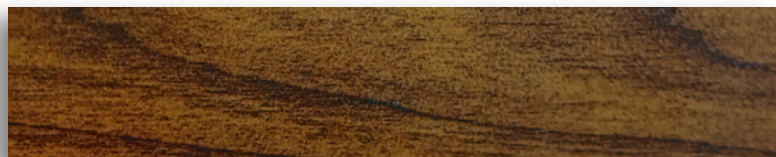

MA10

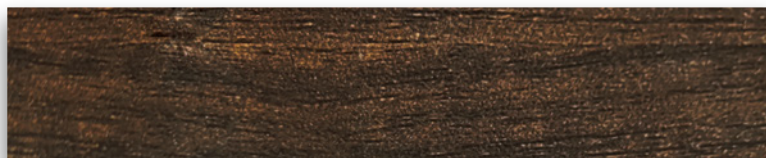

Uni-K
FENESTRATION

+305 420 6910

info@unik-windows.com

  @unik.windows

Download this brochure
with this QR



or visit our website
www.unik-windows.com